




NOTE: This Rollover Kerb ONLY applies to Addisson Avenue and Maryvale Road (Athelstone)

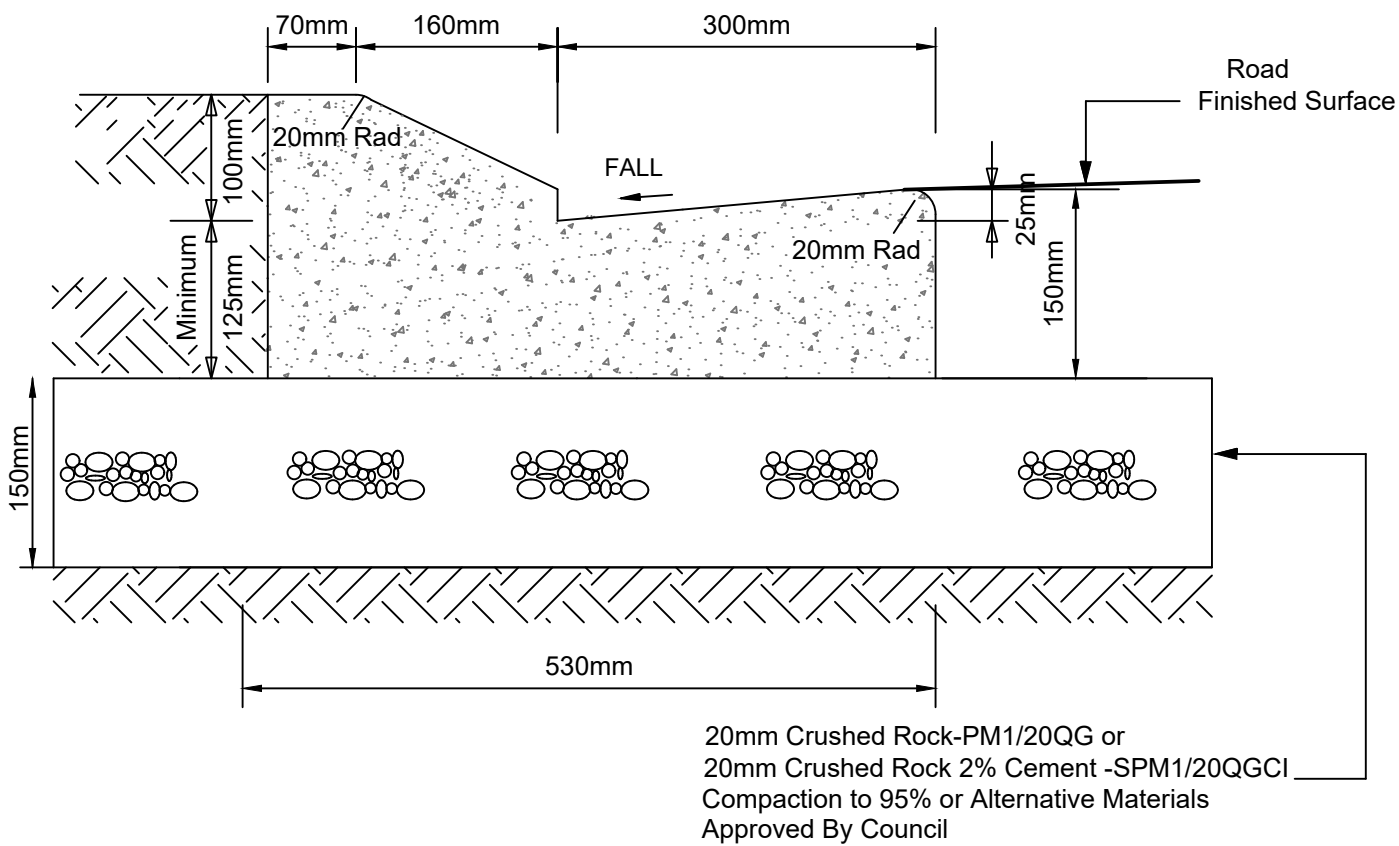

ROLLOVER KERB

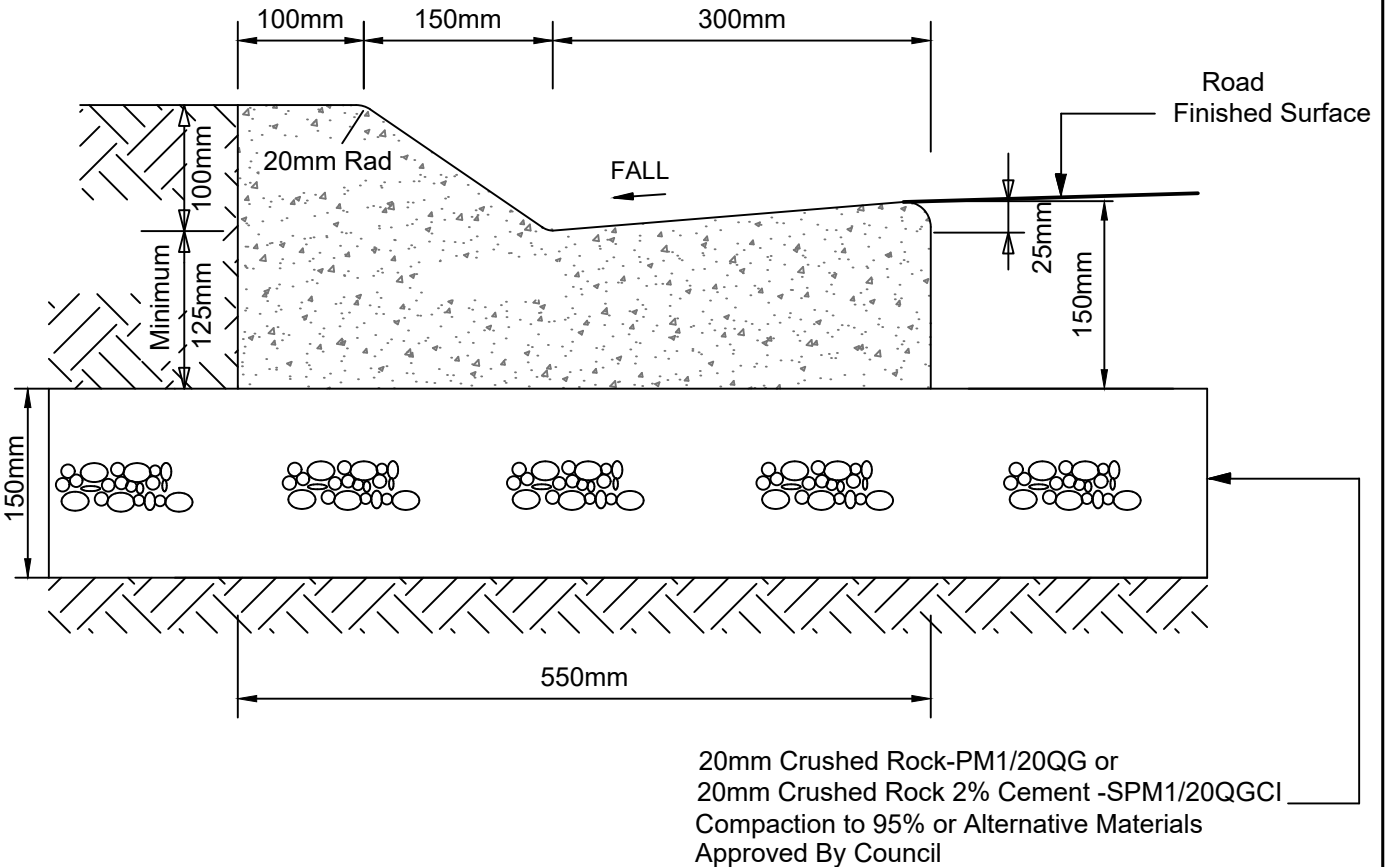

FULLY MOUNTABLE KERB

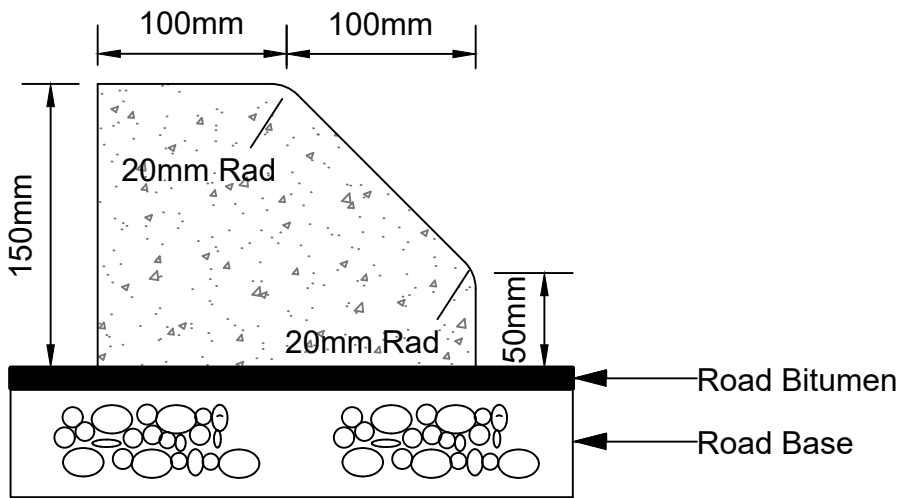

MEDIAN KERB

IMPORTANT NOTES:

- Kerb shall be poured in PLAIN CONCRETE and finished with a steel trowel.
- Minimum compressive strength of hand laid concrete shall be 25MPa at 28 days.
- Minimum compressive strength of machine laid concrete shall be 20MPa at 28 days.
- Construction adjacent to road surface requires a saw cut edge to be prepared prior to excavation and removal of the kerb section and bitumen.
- Kerb should be poured in ONE piece.
- Concrete pour must take place within 2 working days of excavation.
- Should existing infrastructure including road pavement, kerbing be damaged, it must be reinstated to Council's satisfaction and specification.
- Changes to services need to be organised with the relevant utilities at owners expense.

GENERAL NOTES

- Council approval must be granted prior to any works outside of the property boundary, failure to obtain approval may incur a fine of up to \$5,000. (Local Government Act 1999 or the Planning, Development and Infrastructure Act 2016)
- The contractor shall provide all regulatory signs and warning devices for the protection of the public in accordance with Road Traffic Act 1961, Austroads Guide to Temporary Traffic Management and Work Health Safety Act 2012.
- Owner is responsible for contacting Dial Before You Dig on 1100 to locate any services on or under the verge prior to excavating.
- All excavated materials shall be removed from site when excavated.
- Council reserves the right to repair any damage to Council's assets or to replace any unsatisfactory work at owners' expense.
- If you have any further queries, please contact Infrastructures Services on 8366 9222

E			
D			
C			
B	SB	05/09/24	FOR APPROVAL
A	SB	21/08/24	ISSUED FOR COMMENTS
ISSUE	DWG	DATE	REVISION
CHECKED: J. LEE		DRAWN: S. BARTAULA	

TITLE		NAME	DATE	SIGNATURE
SENIOR TRANSPORT OFFICER		C. HARRINGTON	05/09/24	
TEAM LEADER ASSET PLANNING & DESIGN		J.PATHIRANA	05/09/24	
MANAGER OF INFRASTRUCTURE SERVICES		W. DELLA TORRE	05/09/24	
SCALE : NOT TO SCALE				

WARNING

BEWARE OF UNDERGROUND SERVICES

The locations of underground services are approximate only and their exact position should be proven on site. No guarantee is given that all existing services are shown.



DIAL BEFORE YOU DIG

www.1100.com.au

CITY OF CAMPBELLTOWN

FULLY MOUNTABLE KERB, ROLLOVER KERB & MEDIAN KERB DETAILS

UPDATED AUGUST 2024

PLAN No: SD2 SHEET No. 1 of 1 ISSUE B



CAMPBELLTOWN CITY COUNCIL